


Fiber Optic Patch Cable



Cable Design Features :

- 1 - Optical Fiber - Choice of Fiber SM -ITU-T (G652 -D / G655 / G656 / G657-A) MM (OM1/OM2/OM3/OM4)
- 2 - Tight Buffer - 0.9 mm
- 3 - Aramid Yarns - As strength Member
- 4 - Outer Jacket - Choice of PVC / Low smoke Zero Halogen LSZH
- 5 - Easy to strip with choice of Jacket Color (ATC Standard - Blue)
- 6 - Outer diameter - 4.5 mm (1F) 7 mm (2 F / 4 F)

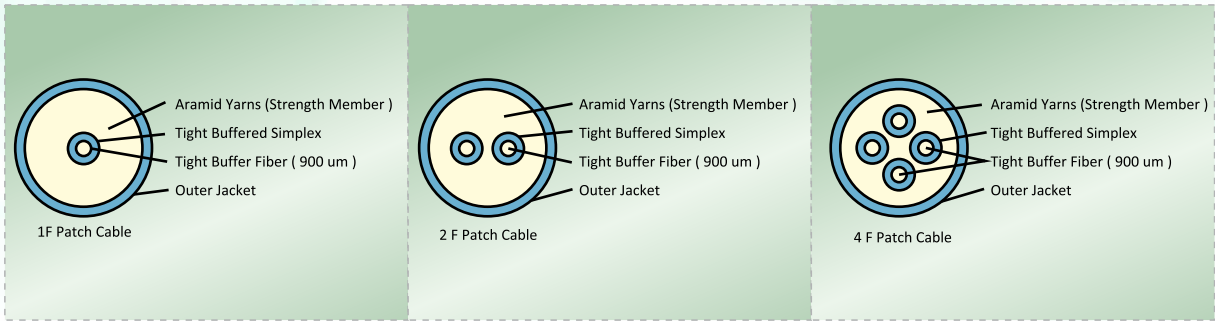

Main Application:

- As building to building connecting cables
- As Indoor cable along the wall ceiling and between layers and in ducts .

ASTRA-SM/MM XX-XX-XX-X-X-XX

Connector End1		Connector End2		Cable Configuration		Fiber Type		Cord color		Cable Length (m)	
01	FC/PC	01	FC/PC	01	1 Fiber	A	SM G652-D	Y	Yellow	01	1 meter
02	FC/APC	02	FC/APC	02	2 Fiber	B	SM G655	B	Blue	02	2 meter
03	SC/PC	03	SC/PC	04	4 Fiber	C	SM G656	O	Orange	03	3 meter
04	SC/APC	04	SC/APC			D	SM G657-A	A	Aqua	05	5 meter
05	LC/PC	05	LC/PC			E	MM 62.5 um (OM1)	X	Customer Specified	10	10 meter
06	LC/APC	06	LC/APC			F	MM 50 um (OM2)			15	15 meter
07	ST/UPC	07	ST/UPC			G	MM 50 um (OM3)			X	Customer Specified
08	MU/PC	08	MU/PC			H	MM 50 um (OM4)				